

ULTRAPURE MELT BLOWN CARTRIDGE FILTERS

Cost effective, disposable sediment filters for a wide range of applications!



Features & Benefits

- 100% polypropylene (PP) depth filter
- High dirt-holding capacity, long filter service life
- Thermal bond without use of adhesives
- No fibre release and media migration
- Excellent chemical resistance
- Various lengths and micron ratings
- Available in 2.5" and 4.5" diameters
- Individually shrink wrapped for purity

Applications


- Potable water filtration
- Pre-filtration for RO+DI systems
- Beverage
- Electronics, plating & coating
- Chemicals & solvents

Specification

Material	Polypropylene
Max. temperature	60°C
Max. pressure	40 psi
Max. flow rate (10" length)	18 LPM / 5 GPM
Type	Standard 2.5" OD Full-flow 4.5" OD
Length	9-7/8", 20", 30", 40"
Micron rating	1, 5, 10, 25, 50, 75, 100

*Special Lengths and Diameters available

Typical Water Flow Rates (10 inch Length)

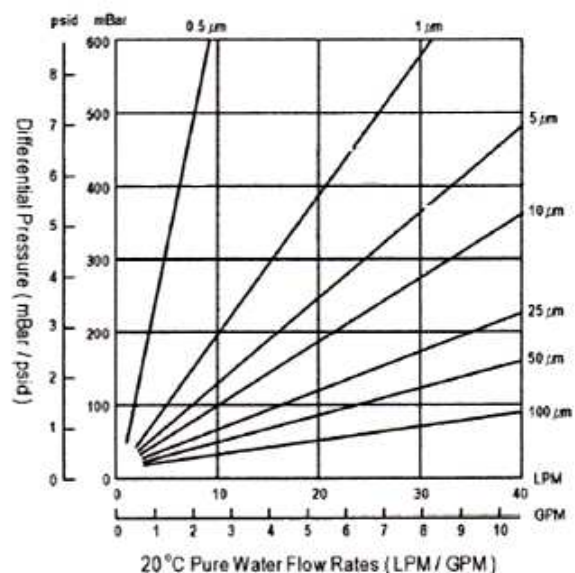

Note: UltraPure Private Limited reserves the right to make any changes to the information provided above without prior notice



ULTRAPURE PRIVATE LIMITED 122 Joo Chiat Road, Singapore 427411
Tel: (65) 64403680 Fax: (65) 64403679 Email: info@ultrapure.com.sg Website: www.ultrapure.com.sg