


ULTRAPURE RO MEMBRANE CARTRIDGES

Ultra-low pressure membrane elements with high flow rates!

The heart of any reverse osmosis system is the reverse osmosis (RO) membrane. UltraPure offers a full line of residential and commercial reverse osmosis membranes. We specialize in residential membranes and ultra low pressure 4" and 8" diameter commercial membranes.

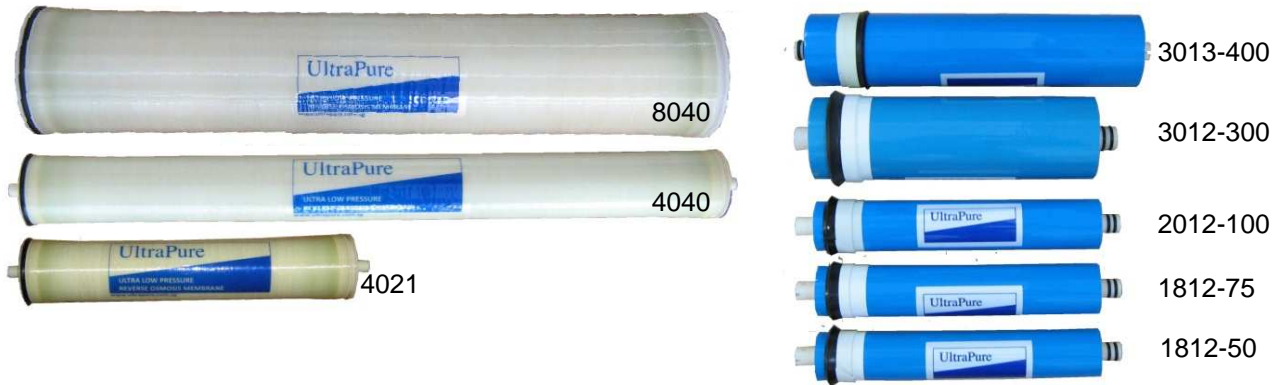

Features & Benefits

- Polyamide-Thin Film Composite (TFC) Membrane Elements
- Ultra low-pressure membrane with an operating parameter of 40-100 psi
- Capacities range from 18-150 gallons per day
- Various applications such as tap water, brackish water and sea water treatments
- Fits all standard RO membrane housings
- Includes one interconnector per membrane



Interconnectors for use in multiple element housings.

Type	Part No.	Membrane Size	Average Permeate Flow GPD (m3/day)	Pressure psi (bar)	Nominal Salt Rejection (%)
Commercial	RO8040ULP	40" x 7.95" (1016mm x 201.9mm)	12000 (45)	150 (10)	95-96
	RO4040ULP	40" x 3.9" (1016mm x 99.7mm)	2800 (10.6)	150 (10)	95-96
	RO4021ULP	21" x 3.9" (533.4mm x 99.7mm)	950 (3.6)	150 (10)	95-96
Residential	RO-3013-400	13" x 3" (303mm x 76.2mm)	400 (1.51)	65 (4.5)	97
	RO-3012-300	11.57" x 3" (294mm x 76.2mm)	300 (1.14)	50 (3.3)	98
	RO-2012-100	11.7"x1.9" (298mm x 48.2mm)	100 (0.38)	60 (4)	95
	RO-1812-75	11.7"x1.75" (298mm x 44.5mm)	75 (0.28)	60 (4)	97.5
	RO-1812-50	11.7"x1.75" (298mm x 44.5mm)	50 (0.19)	60 (4)	97.5
Sea Water	SWRO-8040	40" x 7.95" (1016mm x 201.9mm)	6000 (22.7)	800 (53)	99.7
	SWRO-4040	40" x 3.9" (1016mm x 99.7mm)	1400 (5.3)	800 (53)	99.5

Note: UltraPure Private Limited reserves the right to make any changes to the information provided above without prior notice



ULTRAPURE PRIVATE LIMITED 122 Joo Chiat Road, Singapore 427411
 Tel: (65) 64403680 Fax: (65) 64403679 Email: info@ultrapure.com.sg Website: www.ultrapure.com.sg